



CJX2(LC2-D, LC2-F) Mechanical Interlock contactor

Specifications

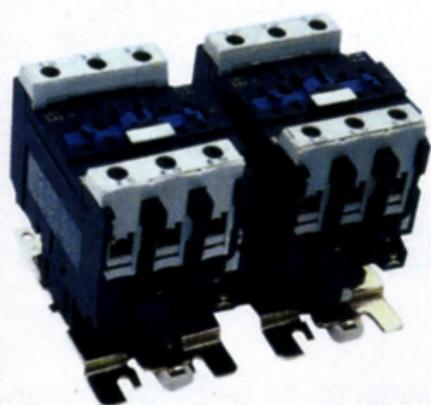

CJX2N(LC2-D)

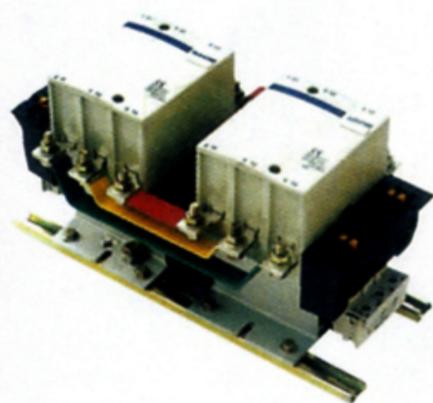

CJX2N-150(LC2-F150)

Type	Tated current AC-3(A)	Controlled power (KW)				
		220V	380V	415V	440V	660V
CJX2N-093(LC2-D0901)	9	2.2	4	4	4	5.5
CJX2N-129(LC2-D1201))	12	5.5	5.5	5.5	5.5	7.5
CJX2N-169(LC2-D1801)	16	7.5	7.5	9	9	10
CJX2N-259(LC2-D2501)	25	5.5	11	11	11	15
CJX2N-329(LC2-D3201)	32	7.5	15	15	15	18.5
CJX2N-403(LC2-D4011)	40	18.5	18.5	22	22	30
CJX2N-403(LC2-D5011)	50	15	22	25	30	33
CJX2N-633(LC2-D6311)	63	18.5	30	37	37	37
CJX2N-803(LC2-D8011)	80	22	37	45	45	45
CJX2N-953(LC2-D9511)	95	22	45	45	45	41

Size: CJX2N(LC2-F)	115	1154	185	1854	265	2654
Maximum rated voltage	1000V	1000V	1000V	1000V	1000V	1000V
Maximum thermal current 1th	200A	200A	270A	270A	350A	350A

Maximum rated current
LL:Long life/NL:Normal life
3ph...440V 50/60Hz

Maximum standard power rating under Ac3 duty	220V	kw	30	30	45	—	55	55	63	—	75	75	90	
		hp	40	40	60	—	75	75	85	—	100	100	125	
	380V	kw	—	55	55	75	—	90	90	110	—	132	132	60
		hp	—	75	75	100	—	125	125	150	—	180	180	220
415/ 440V	kw	—	60	60	80	—	100	100	110	—	140	140	160	
	hp	—	80	80	110	—	135	135	150	—	190	190	220	

Size: CJX2N(LC2-F)	400	4004	500	630	780
Maximum rated voltage	1000V	1000V	1000V	1000V	1000V
Maximum thermal current 1th	500A	500A	700A	1000A	1600A

Maximum rated current
LL:Long life/NL:Normal life
3ph...440V 50/60Hz

Maximum standard power rating under Ac3 duty	220V	kw	—	110	110	132	147	185	200	220	220	280
		hp	—	150	150	180	200	250	270	300	300	380
	380V	kw	—	200	200	220	250	335	335	400	400	500
		hp	—	270	270	300	340	450	450	540	540	680
415/ 440V	kw	—	220	220	250	280	355	375	450	425	530	
	hp	—	300	300	340	380	480	500	610	570	720	